arXiv:1301.4733v6 [physics.gen-ph] 14 Mar 2013

Exact Results for Random Two-way Selections

Bin Zhou[a,b],[*] Shu-Jia Qin[c], Xiao-Pu Han[d], Zhe He[a], Jia-Rong Xie[a], and Bing-Hong Wang[a,e]
[a] *Department of Modern Physics, University of Science and Technology of China, Hefei, 230026, China*
[b] *Jiangsu University of Science and Technology, Zhenjiang, Jiangsu 212003, China*
[c] *State Key Lab of Robotics, Shenyang Institute of Automation,*
Chinese Academy of Sciences, Shenyang, 110016, China
[d] *Institute of Information Economy and Alibaba Business College,*
Hangzhou Normal University, Hangzhou, 310036, China
[e] *The Research Center for Complex System Science, University of Shanghai for Science and Technology, Shanghai, 200093 China*
(Dated: March 15, 2013)

Two-way selections play an important role in human social life. In this paper, we analyze the minimum model of random two-way selections system and provide its exact results on the matching ratio. Defining two basic relative ratios: η for the ratio of selection quantities from both sides, and ξ for the ratio of the total number of states to the smaller number of two sides, we find the matching rate P of two-way selections trends toward an inverse proportion to both η and ξ, in agreement with the numerical simulations. We also surprisingly notice that, most of the empirical data of the matchmaking fairs, the typical real-world two-way selections, are completely included in the range predicted by our model. More interestingly, by the fitting of empirical data, we find that the average number of characters in real-world human sexual chosen is about 15, which is generally in agreement with daily experiences, implying our model would be useful for the estimation on the main factors of affecting the results of two-way selections.

PACS numbers: 89.75.-k, 89. 65.Ef, 05.45.-a

I. INTRODUCTION

Two-way selections between people are very common in daily life, such as the marriage selections between men and women, the selections between seekers and recruiters, and trades between buyers and sellers. In a sense, two-way selections can be regarded as the base in the build of many social relationships. Generally, the participants in a two-way selection process usually consider many characters of the people in the other side. For instance, in the human marriage selections, her/his looks, personality, wealth, sense of humor, and so on, are usually in the considerations. These characters, which generally can not clearly be distinguished and are difficult to be estimated through traditional methods such as psychological test and social survey, deeply affect the result of selection. Furthermore, two-way selections are usually affected by many factors, such as, the size of members on the two sides and the corresponding ratio. For example, the supply-demand ratio on market would deeply influence on the prices and business practices. Therefore, it would be significant to study the basic laws dominating the two-way selections, including the factors affecting the matching rate and the method for estimating the total number of characters affecting the selection. The basic laws may be useful for several social services such as the prediction of friendships and social relations[1–9], seeking marital partners, and so on.

In this paper, we propose a minimum model for two-way selections to investigate the factors influencing on the matching rate. Based on our model, we also find an efficient way to estimate the total number of characters affecting the two-way selections from empirical data.

II. THE MODEL AND RESULTS

Generally speaking, two-way selections have at least two parts of members, and the condition of successful matching is usually that the two sides of pairing satisfy the characters for each other. The minimum model of random two-way selections can be described as follows: i). The systems has two types of agents, A and B, respectively with the total number k_1 and k_2. ii). Each agent (the i-th agent, say), either in type A or type B, has a own character signed by C_{Ai} ($i \in A$) or C_{Bi} ($i \in B$). At the same time, the character which each agent want to select is signed by S_{Ai} or S_{Bi}. Therefore, describing the state of each agent Ai or Bi requires two characters which are independently chosen from n kinds of characters following the uniform distribution. iii). The condition of successful match of two agents ($i \in A$ and $j \in B$) is $C_{Ai} = S_{Bj}$ and $S_{Ai} = C_{Bj}$.

---

[*] Electronic address: binzhou@mail.ustc.edu.cn

For given k_1, k_2, and n, the total number of matching pairs E can be written out according to the rules above:

$$E\left(k_1, k_2, n\right) = k_1 \sum_{i=0}^{k_1} \left[\sum_{j=i+1}^{k_2} C_{k_1-1}^{i} C_{k_2}^{j} \left(\frac{1}{n^2}\right)^{i+j} \left(\frac{n^2-1}{n^2}\right)^{k_1+k_2-i-j-1} \right] + k_2 \sum_{j=0}^{k_2} \left[\sum_{i=j}^{k_1} C_{k_1}^{i+1} C_{k_2-1}^{j-1} \left(\frac{1}{n^2}\right)^{i+j} \left(\frac{n^2-1}{n^2}\right)^{k_1+k_2-i-j-1} \right]. \tag{1}$$

According to :

$$\lim_{k\to\infty} C_k^i x^i (1-x)^{k-i} = \frac{e^{-\lambda}\lambda^i}{i!}, \quad \sum_{i=0}^{\infty} \frac{x^i}{(i!)^2} = \mathrm{BesselI}(0, 2\sqrt{x}), \quad \sum_{i=0}^{\infty} \frac{x^i}{(i!)(i-1)!} = \sqrt{x}\mathrm{BesselI}(1, 2\sqrt{x}), \tag{2}$$

where $\lambda = xk$, $\mathrm{BesselI}(0, 2\sqrt{x})$ and $\mathrm{BesselI}(1, 2\sqrt{x})$ are Bessel functions of the amount of virtual cases. From Eq.(1) we obtain

$$E \approx k_1 \left[1 - e^{-\lambda_1-\lambda_2} \left(\mathrm{BesselI}\left(0, 2\sqrt{\lambda_1\lambda_2}\right) + \sqrt{\frac{\lambda_1}{\lambda_2}} \mathrm{BesselI}\left(1, 2\sqrt{\lambda_1\lambda_2}\right) \right) \right], \tag{3}$$

where $\lambda_1 = k_1/n^2$, $\lambda_2 = k_2/n^2$.

Due to the symmetry of k1 and k2 in Eq.(1) , it is enough to study the range $k_1 \leqslant k_2$. We discuss Eq.(1) under three conditions of different relative magnitude of k_1,k_2 and n^2. When $k_1 \leqslant k_2 \ll n^2$, resulting in $\lambda_1 \to 0, \lambda_2 \to 0$, we only need to calculate the zeroth power term and the first power term of Eq.(3). We obtain

$$E \approx \frac{1}{n^2} k_1 k_2. \tag{4}$$

When $k_1 \leqslant n^2 \ll k_2$ or $n^2 \ll k_1 \leqslant k_2$, according to

$$\lim_{x\to\infty} \mathrm{BesselI}(0, 2x) = \lim_{x\to\infty} \mathrm{BesselI}(1, 2x) = \frac{e^{2x}}{2\sqrt{\pi x}}, \tag{5}$$

from Eq.(3) we obtain

$$E \approx k_1 - k_1 \left[\frac{e^{-(\sqrt{\lambda_1}-\sqrt{\lambda_2})^2}}{\sqrt{\pi\sqrt{\lambda_1\lambda_2}}} \right]. \tag{6}$$

Because Eq.(6) is obtained under the condition of $k_1 \leqslant n^2 \ll k_2$ or $n^2 \ll k_1 \leqslant k_2$, k_2 is very large, from Eq.(6) we can obtain

$$E \approx k_1. \tag{7}$$

We defined that

$$\eta = \frac{k_2}{k_1}, \quad \xi = \frac{n^2}{k_1}, \quad P = \frac{2E}{k_1 + k_2}. \tag{8}$$

Therefore, η represents the ratio between k_2 and k_1; ξ represents the ratio between n^2 and k_1; P represents the probability of the agents which successfully match. The Eq.(3) is transformed into

$$P = \frac{2}{1+\eta} \left[1 - e^{-\frac{1}{\xi}-\frac{\eta}{\xi}} \left(\mathrm{BesselI}\left(0, \frac{2\sqrt{\eta}}{\xi}\right) + \frac{1}{\sqrt{\eta}} \mathrm{BesselI}\left(1, \frac{2\sqrt{\eta}}{\xi}\right) \right) \right]. \tag{9}$$

The Eq.(4) can written as:

$$P \approx \frac{2\eta}{\xi(\eta+1)} \qquad (1 \leqslant \eta \ll \xi). \tag{10}$$

The Eq.(7) can written as:

$$P \approx \frac{2}{\eta+1} \qquad (1 \leqslant \xi \ll \eta \quad or \quad \xi \ll 1 \leqslant \eta). \tag{11}$$

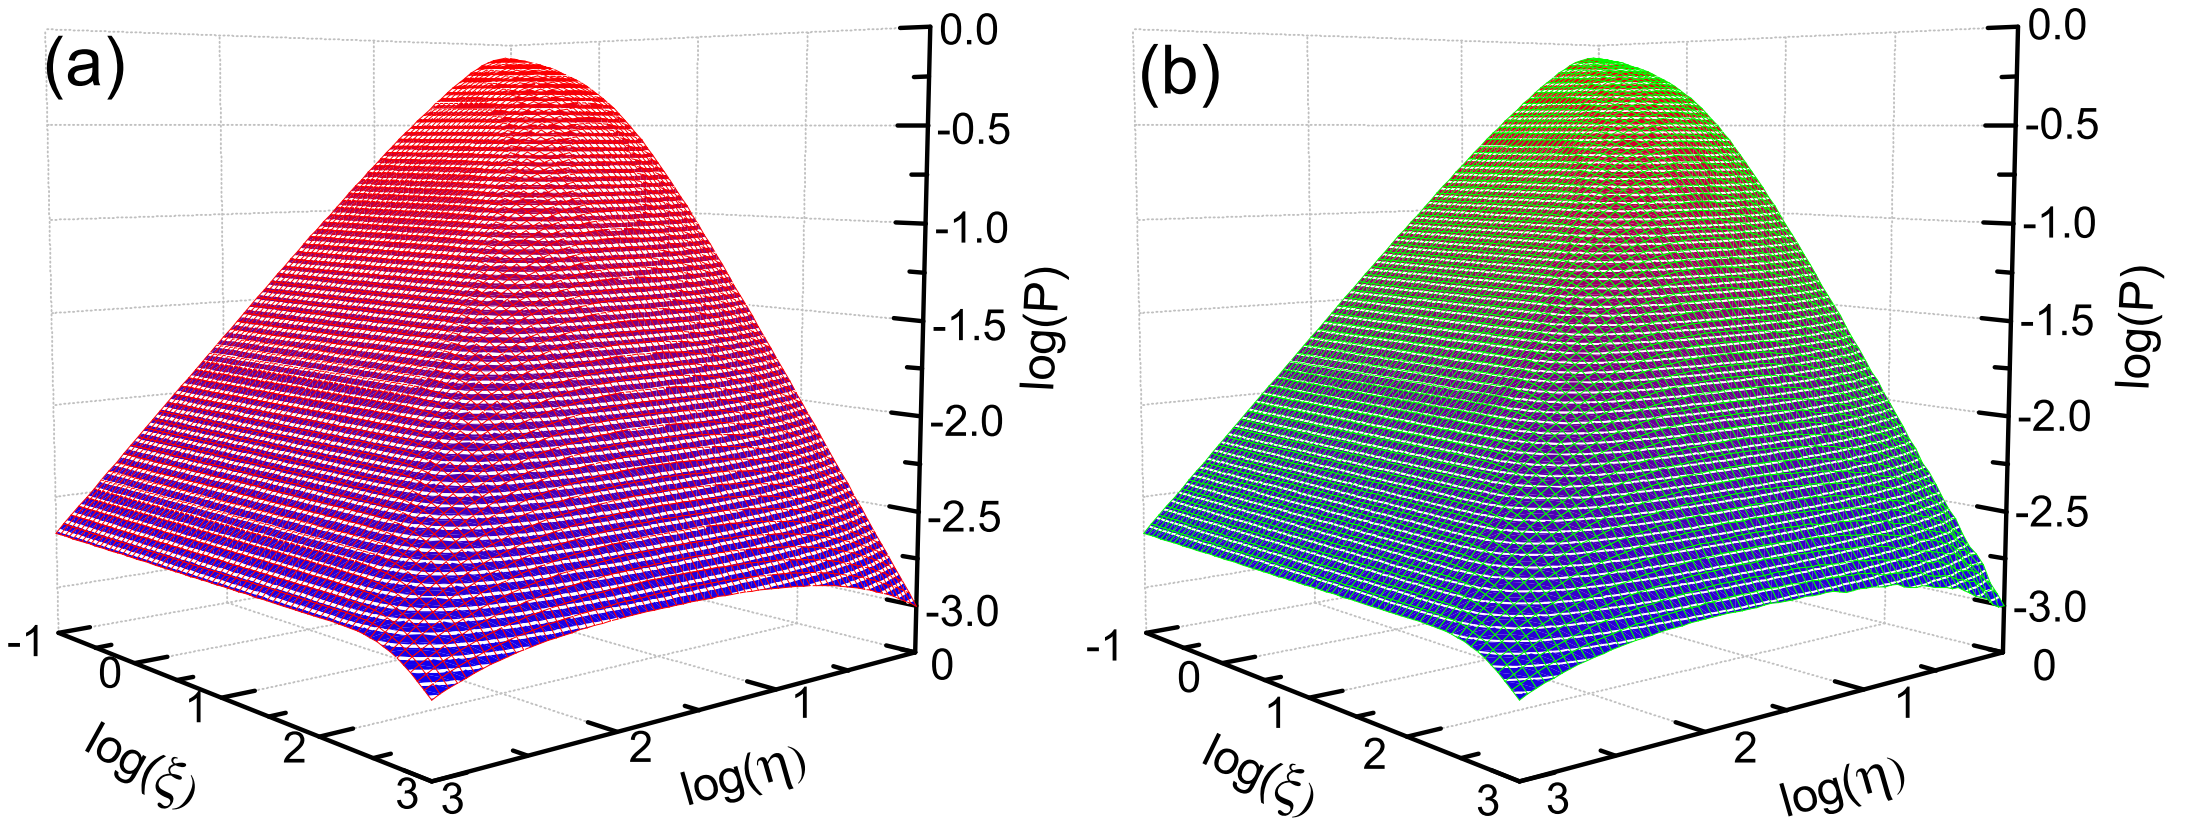

FIG. 1: (Color online) The comparison between analytical predictions and the simulation results. In the two sub-figures, the parameter $k_1 = 100$; η is assigned values from 1 to 1000; ξ is assigned values from 0.1 to 1000. (a) shows analytical predictions of Eq.(1); (b) shows the simulation results.

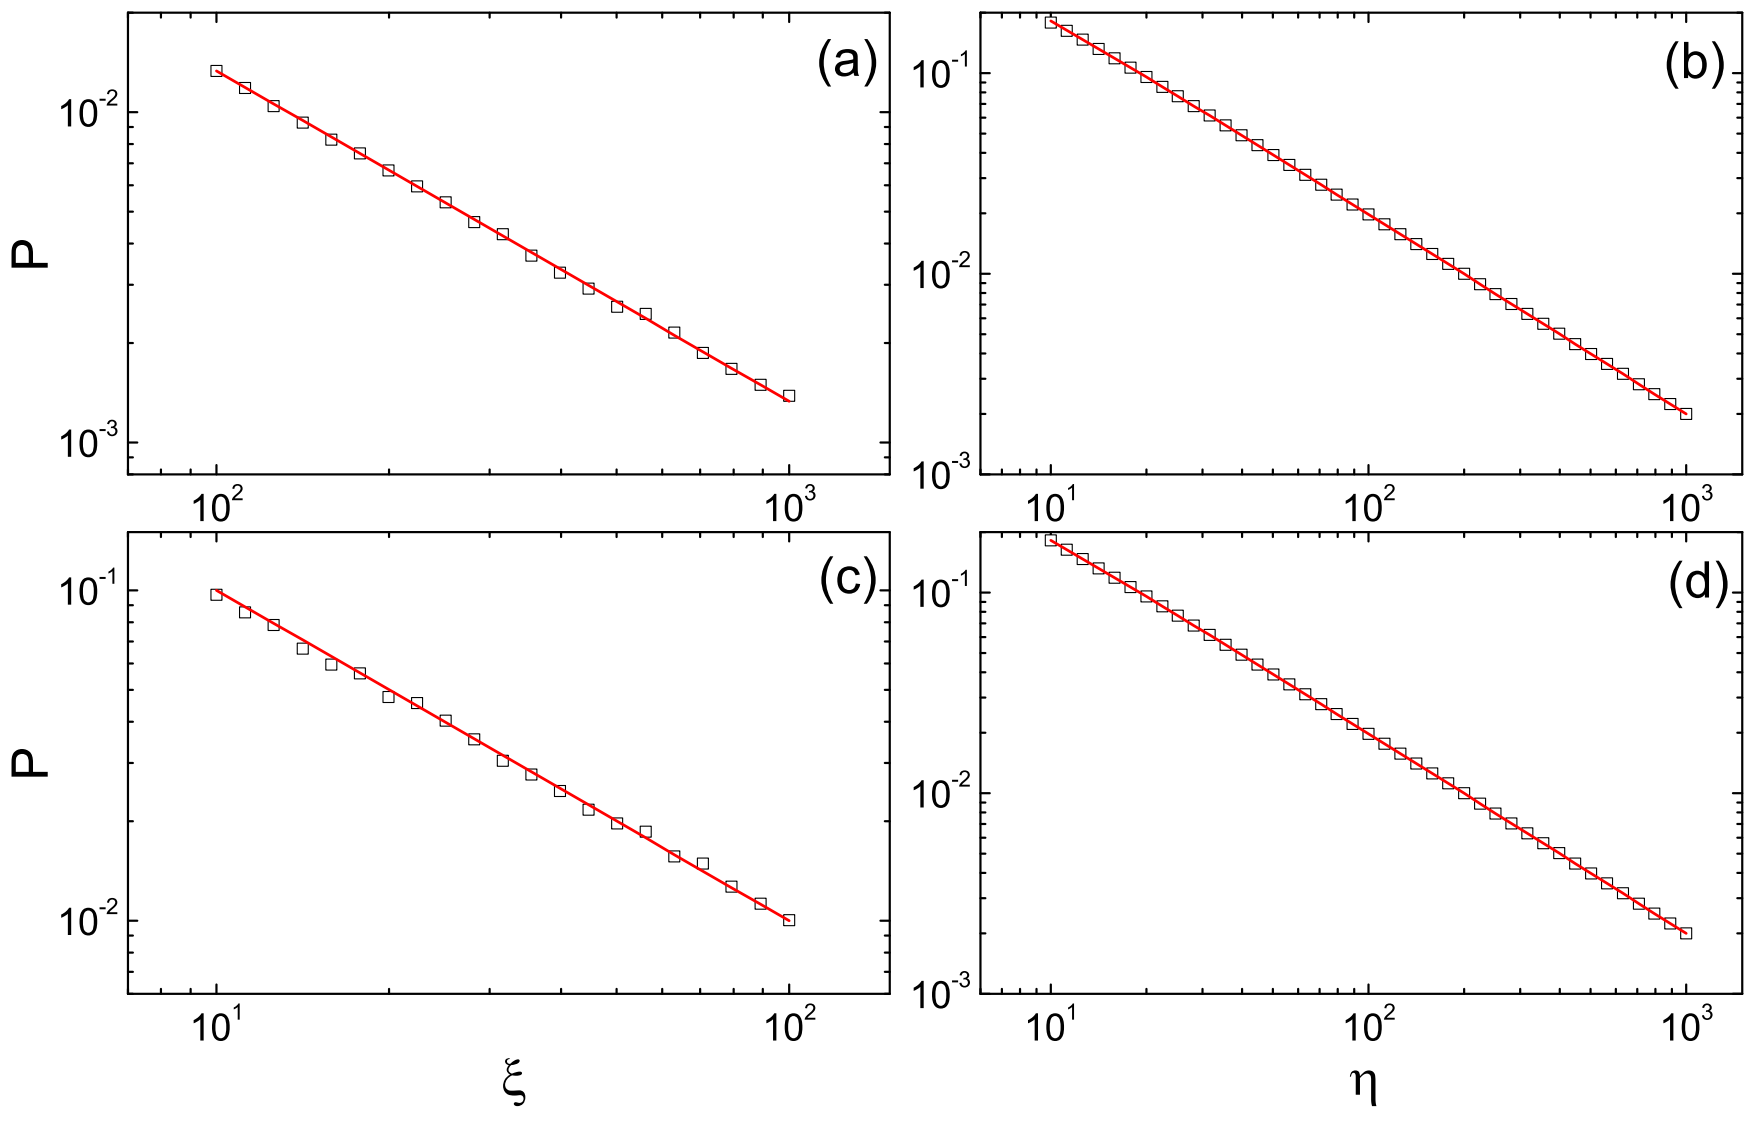

FIG. 2: (Color online) The comparison between analytical predictions and the simulation results in the log-log plots. In the four sub-figures, the parameter $k_1 = 100$; the squares indicate the simulation data; the solid lines indicate analytical predictions. (a), $\eta = 2$; ξ is assigned values from 100 to 1000; the solid line is obtained from Eq.(10). (b), $\xi = 2$; η is assigned values from 10 to 1000; the solid line is obtained from Eq.(11). (c), $\eta = 1$; ξ is assigned values from 10 to 100; the solid line is obtained from Eq.(12). (d), $\xi = 0.1$; η is assigned values from 10 to 1000; the solid line is obtained from Eq.(11).

Fig 1.(a) and Fig 1.(b) show the comparison between analytical predictions of Eq.(1) and the simulation results. Fig 2.(a) shows the comparison between analytical predictions of Eq.(10) and the simulation results under condition $1 \leqslant \eta \ll \xi$ and displays a power-law distribution with the exponent -1 between P and ξ. Fig 2.(b) shows the comparison between analytical predictions of Eq.(11) and the simulation results under condition $1 \leqslant \xi \ll \eta$ and displays a power-law distribution with the exponent -1 between P and η; Fig 2.(d) shows the comparison between analytical predictions of Eq.(11) and the simulation results under condition $\xi \ll 1 \leqslant \eta$ and displays the same power-law distribution to Fig 2.b. The above analytical predictions and simulation results are consistent with each other. It is that to say all analytical results are reliable.

Consider a special case $k_1 = k_2 = k$, resulting in $\eta = 1$. On the one hand, from Eq.(10) we obtain

$$P \approx \frac{1}{\xi}. \tag{12}$$

The relation between P and ξ approximate to power law with the exponent -1,and this case is well shown in Fig 2.(c); from

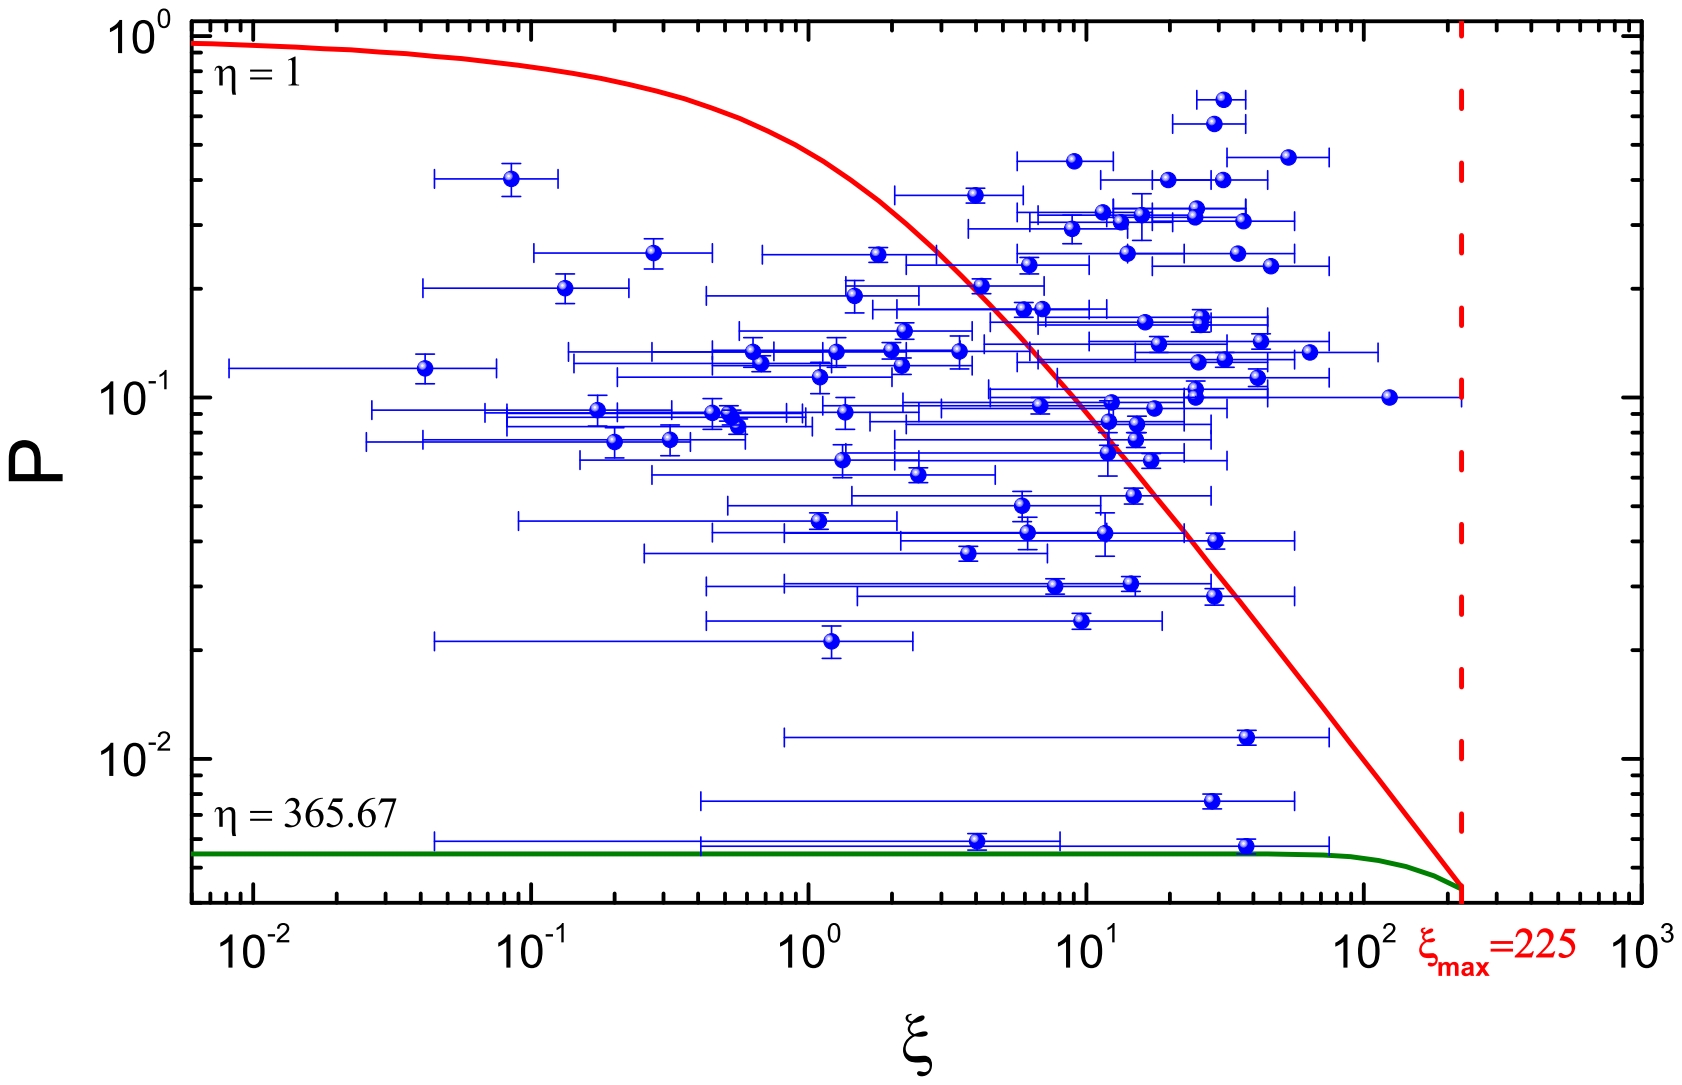

FIG. 3: (Color online) The relationship between the experimental evidence and analytical predictions in the log-log plots. The red curve and the olive curve are obtained from Eq.(9), and The parameters of red curve are $\eta = 1$, $n = 15$; The parameters of olive curve are $\eta = 356.67$, $n = 15$. The round dots represent the empirical data in APPENDIX A. The ξ_{max} represent the maximum value 225 of ξ.

Eq.(11) we obtain $P \approx 1$, it means that almost all of agents can match successfully under condition $\xi \ll 1 \leqslant \eta$. On the other hand, according to $k_1 = k_2 = k$, resulting in $\lambda_1 = \lambda_2$, from Eq.(6) we obtain

$$E \approx k - \sqrt{\frac{n^2}{\pi}}\sqrt{k}. \tag{13}$$

The second term of Eq.(13) is the number of the agents which can not successfully match in type A or type B. The larger k is, The smaller $\sqrt{n^2/\pi}\sqrt{k}/k$ is. In reality, It's a result of fluctuation. There are n^2 kinds of the states that a agent maybe have in the model. In theory, the expected times of each state appearing is k/n^2. However, due to the fluctuations, almost all frequencies of every states appearing deviate around k/n^2. As a result, some agents can not successfully match. The number of times that each state may appear obeys the binomial distribution. The fluctuation is close related to the standard deviation, according to the binomial theorem and standard deviation formula, we can obtain that the standard deviation equals to $\sqrt{k(1-1/n^2)/n^2}$, which is directly proportional to $\sqrt{k}$. Thus, the number of the agents which can not successfully match is also proportional to $\sqrt{k}$. It explains the relationship between the second item of Eq.(13) and $\sqrt{k}$. From Eq.(13), we know that the proportionality coefficient is $\sqrt{n^2/\pi}$.

Finally, we validate our model in the experimental evidence way. The marriage selections between men and women is a typical real-world two-way selections system. Here we collect eighty-two news of real-world matchmaking fairs from the Internet (see APPENDIX A). But the information of our data are incomplete. Only the numbers of participants and matching pairs are recorded. The numbers of men and women joined are omitted. So parameter η can not be determined exactly, but can only be restricted at a range. And n is a internal parameter need to be measured. We deal with the data and measure n below.

We first consider the parameter η. Because $k_1 \leqslant k_2$, the minimum value of η is $\eta_{min} = 1$. For each set of data, there is a maximal value. Take the first set of data in TABLE I for example, there are 13 participants and 3 couples matched, thus $k_{1,1} \geqslant 3$, according to Eq.(8), $\eta \leqslant \eta_{max,1} = (13-3)/3$. And we define two signs: $\eta_{max,min} = \min_{i=1}^{82} \eta_{max,i} = 2$, $\eta_{max,max} = \max_{i=1}^{82} \eta_{max,i} = 365.67$ by calculating eighty-two sets of data in TABLE I. We estimate n by minimizing

$$\sum_{i=1}^{82} (P_{data,i} - P_{analysis,i})^2 \tag{14}$$

in which P_{data} comes from the experimental data and $P_{analysis}$ calculated from Eq.9. Firstly, we take $\eta = \eta_{min} = 1$, and n ranges from 1 to 10^4 with a step size of 1, by calculating Eq.(14), we find that when $n = 17$, Eq.(14) is minimal. Then we take $\eta = \eta_{max,min} = 2$, the same to way, we minimize Eq.(14) and find $n = 13$. In the Eq.(8), n^2 and η are inversely proportional relationship ,therefore, we define $n_{max} = 17$ and $n_{min} = 13$, and n belongs to $[13, 17]$. Finally we estimate n by $n = (n_{max} + n_{min})/2 = 15$ and fix it.

Fig 3 shows the relationship between the experimental evidence and analytical predictions of our model. The red curve and olive curve are obtained from Eq.(9). The parameters of red curve are $\eta = 1$, $n = 15$; the parameters of olive curve are $\eta = 356.667$, $n = 15$. From the Eq.(8), when k_1 is equal to the minimum 1, the ξ take the maximum value 225. The error bar of ordinate P of round dots represents the range of empirical data P in TABLE I. Because k_1 is unknown and ξ is undetermined, we can only obtain $k_{1,min,i} = E_i \leqslant k_{1,i} \leqslant k_{1,max,i} = (k_1 + k_2)/2$ and $15^2/k_{1,max,i} \leqslant \xi_i \leqslant 15^2/k_{1,min,i}$. Therefore, the rang of abscissa ξ of round dots is relatively wide and the middle points take $\xi_i = (15^2/k_{1,max,i} + 15^2/k_{1,min,i})/2$.

We can see from Fig.3 that when ξ is relatively small, corresponding k_1 relatively big, all empirical data are enclosed in between the the two curves; when ξ is relatively big, corresponding k_1 relatively small, some empirical data are enclosed in between the two curves, however others empirical data lie the red curve above and the trend of the empirical data is opposite to the analytical predictions. We have two reasons to explain them: one the one hand, organizers of some matchmaking fairs select less guests who meet their requirements to participate the matchmaking fairs from a lot of people who enter name and want to participate the matchmaking fairs. In this case, each guest is easier to find the right opposite sex who can match for each other; one the other hand, when the number of guests is small in a matchmaking fair, they know that it is very difficult to find the right opposite sex who can match for each other, so they are not to find the right opposite sex but tend to choose a basically mutually acceptable opposite sex. In this psychological effect, each guest is also easier to find the opposite sex to pair. The two reasons above cause that the fewer the guests are, the higher the probability p is. From the above analysis, the experimental data can be well explained by the model.

III. CONCLUSIONS

In summary, we provide the exact solution for random two-way selections system. The dynamics mechanism of a model is established and the analytical result is obtained. In several different conditions, we obtain the approximative and compact analytical results which agree with the simulation results. In the model, the parameter n is the total number of the characters from which each agent can chose and directly determine the probability of successful match. Therefore, n is a very important parameter for random two-way selections system. We propose a method to estimate the value of n by fitting empirical data. In this paper, the typical experimental data is collected by the Internet and the range of parameter n is estimated by the method we proposed. We find that the average of n is 15, which is in agreement with daily experiences, and that most of the experimental evidence data fall into the range predicted by our model. So the method would be useful to estimate the parameter n, and such simple model indeed catch the core of random two-way selections system in reality and would be valuable to the real life and several online social services.

Acknowledgments

This work was funded by the National Important Research Project (Grant No. 91024026), the National Natural Science Foundation of China (No. 11205040, 11105024, 11275186), the Major Important Project Fund for Anhui University Nature Science Research (Grant No. KJ2011ZD07) and the Specialized Research Fund for the Doctoral Program of Higher Education of China (Grant No. 20093402110032).

Appendix A: Empirical Data of Matchmaking Fairs

We collect 82 online news of real-world matchmaking fairs and record the number of guests and matching pairs. Due to some of news did not report exact numbers, we suppose each of these uncertain numbers has 10% possible ranges. The reports of these uncertain numbers generally have three types: nearly x, about x, and over x (here x is the number). For “’nearly x”, we set the possible range is $0.95x \pm 0.05x$, and $1.00x \pm 0.05x$ for “about x”, and $1.05x \pm 0.05x$ for “over x”. All of these information is shown in Table 1.

---

[1] L. Lü, T. Zhou, Link prediction in complex networks: A survey. Physica A 390, (2011) 1150.
[2] R. Guimer, M. Sales-Pardo, Missing and spurious interactions and the reconstruction of complex networks, Proc. Nat. Acad. Sci. USA,106 (2009) 22073.
[3] L. Lü, M. Medo, C.-H. Yeung, Y.-C. Zhang, Z.-K. Zhang, T. Zhou, Recommender systems, Phys. Rep., 519 (2012) 1.
[4] C.-J. Zhang, A. Zeng, Behavior patterns of online users and the effect on information filtering, Physica A, 391 (2012) 1822.
[5] J.-L. Guillaume, M. Latapy, Bipartite structure of all complex networks, Inform. Proc. Lett., 90 (2004) 215.

[6] M.-S. Shang, L. Lü, Y.-C. Zhang, T. Zhou, Empirical analysis of web-based user-object bipartite networks, EuoPhys. Lett., 90 (2010) 48006.

[7] R. Guimer, M. Sales-Pardo, L. Amaral, A Nunes, Module identification in bipartite and directed networks, Phys. Rev. E., 76 (2007) 036102.

[8] Y.-B. Zhou, L. Lü, M. Li, Quantifying the influence of scientists and their publications: distinguishing between prestige and popularity, New J. Phys., 14 (2012) 033033.

[9] L. Li, Z. Yang, L. Liu, M. Kitsuregawa, Query-url bipartite based approach to personalized query recommendation, Proceedings of the 23rd national conference on Artificial intelligence. (2008) 1189.

TABLE I: The data of matchmaking fairs

Website of the reports of matchmaking fairs	Original descriptions	The total of joined people: $k_1 + k_2$	The total number of matched pairs E	Matching ratio P
http://www.cdb.org.cn/newsview.php?id=6359	13 joined; 3 matched	13	3	0.4615
http://sd.people.com.cn/n/2012/0827/c183718-17407663.html	18 joined; 6 matched	18	6	0.6667
http://news.carnoc.com/list/183/183765.html	20 joined; 1 matched	20	1	0.1000
http://bbs.tiexue.net/post2_5756757_1.html	21 joined; 6 matched	21	6	0.5714
http://www.shxb.net/html/20110516/20110516_278862.shtml	25 joined; 5 matched	25	5	0.4000
http://news.qq.com/a/20100511/000472.htm	26 joined; 3 matched	26	3	0.2308
http://bbs.ganxianw.com/thread-46316-1-1.html	26 joined; 4 matched	26	4	0.3077
http://www.wzrb.com.cn/article321273show.html	30 joined; 2 matched	30	2	0.1333
http://www.wccdaily.com.cn/epaper/hxdsb/html/2012-05/14/content_448239.htm	32 joined; 4 matched	32	4	0.2500
http://wbnews.sxrb.com/news/ty/1372966.html	36 joined; 6 matched	36	6	0.3333
http://www.nbmz.gov.cn/view.aspx?id=16595&AspxAutoDetectCookieSupport=1	36 joined; 6 matched	36	6	0.3333
http://nb.people.com.cn/GB/200892/16491824.html	38 joined; 6 matched	38	6	0.3158
http://cq.cqwb.com.cn/NewsFiles/201203/25/921397.shtml	40 joined; 8 matched	40	8	0.4000
http://www.sc.chinanews.com.cn/my/data/html/201212/32619.html	over 40 joined; 3 matched	42 ± 2	3	0.1432 ± 0.0068
http://www.16466.com/info_detail.htm?id=36526	over 50 joined; 3 matched	53 ± 3	3	0.1136 ± 0.0064
http://www.ncnews.com.cn/ncxw/shxw/t20121112_943114.htm	about 60 joined; 5 matched	60 ± 3	5	0.1671 ± 0.0084
http://news.wzsee.com/2012/0502/130061.html	over 60 joined; 4 matched	63 ± 3	4	0.1273 ± 0.0061
http://news.hexun.com/2012-08-27/145162214.html	over 60 joined; 5 matched	63 ± 3	5	0.1591 ± 0.0076
http://www.douban.com/group/topic/28145139/	over 60 joined; about 10 matched	63 ± 3	10 ± 1	0.3197 ± 0.0470
http://zhuanti.10yan.com/zt/other/sdcms/html/xqj2012/xiangqindongtai/1377.html	72 joined; 11 matched	72	11	0.3056
http://www.wlmqwb.com/3229/syzt/hdzt/seven/201007/t20100719_1287834.shtml	80 joined; 5 matched	80	5	0.1250
http://www.dpcm.cn/html/news/shehui/20121211/8a485b96f289e038.htm	80 joined; 10 matched	80	10	0.2500
http://www.zhaogejia.com/News/Show/166	80 joined; 13 matched	80	13	0.3250
http://cq.cqnews.net/shxw/shwx/200909/t20090928_3635782.htm	80 joined; 18 matched	80	18	0.4500
http://a.jiaodong.net/jiaoyou/detail/?/20120717134715.htm	nearly 100 joined; 5 matched	95 ± 5	5	0.1056 ± 0.0056
http://www.dllake.com/testurl/news/news.asp?id=1874	99 joined; 8 matched	99	8	0.1616
http://fj.qq.com/a/20120413/000073.htm?pgv_ref=aio2012&ptlang=2052	100 joined; 5 matched	100	5	0.1000
http://epaper.lnd.com.cn/html/bdcb/20110118/bdcb635730.html	about 100 joined; 7 matched	100 ± 5	7	0.1404 ± 0.0070
http://news.zh853.com/NewsShow-22166.html	over 100 joined; 16 matched	110 ± 10	16	0.2933 ± 0.0267
http://news.163.com/11/1123/08/7JHJ4PP100014AED.html	150 joined; 7 matched	150	7	0.0933
http://news.xinmin.cn/rollnews/2011/05/03/10539635.html	nearly 200 joined; 8 matched	190 ± 10	8	0.0844 ± 0.0044
http://www.0523qq.com/forum.php?mod=viewthread&tid=2779	nearly 200 joined; 22 matched	190 ± 10	22	0.2322 ± 0.0122
http://news.ycw.gov.cn/html/2012-04/28/content_15150376.htm	about 200 joined; 4 matched	200 ± 10	4	0.0401 ± 0.0020
http://epaper.lnd.com.cn/html/bdcb/20110118/bdcb635730.html	206 joined; 10 matched	206	10	0.0971
http://www.cqwb.com.cn/NewsFiles/201005/30/20102930062910354716.shtml	over 200 joined; 7 matched	210 ± 10	7	0.0668 ± 0.0032
http://bddsb.bandao.cn/data/20120827/html/53/content_2.html	over 200 joined; 8 matched	210 ± 10	8	0.0764 ± 0.0036
http://www.zhaogejia.com/News/Show/150	over 200 joined; 38 matched	210 ± 10	38	0.3627 ± 0.0173
http://3g.3xgd.com/news/play.asp?NewsID=80975	216 joined; 19 matched	216	19	0.1759
http://wed.cnhan.com/hjb/2012-12-03/3900.html	over 240 joined; 22 matched	252 ± 12	22	0.1750 ± 0.0083
http://xt.fangyuan365.com/article/List.asp?ID=8708	about 258 joined; over 10 matched	258 ± 13	11 ± 1	0.0859 ± 0.0121
http://cq.cqnews.net/shxw/2012-11/12/content_21432170.htm	nearly 300 joined; 4 matched	285 ± 15	4	0.0282 ± 0.0014
http://xt.fangyuan365.com/article/List.asp?ID=11694	about 300 joined; 8 matched	300 ± 15	8	0.0535 ± 0.0027
http://roll.sohu.com/20120625/n346389451.shtml	over 300 joined; over 10 matched	315 ± 15	11 ± 1	0.0703 ± 0.0097
http://www.ijxjj.com/article/article_12773.html	over 300 joined; 32 matched	315 ± 15	32	0.2036 ± 0.0097
http://news.xinmin.cn/shehui/2013/02/16/18638248_2.html	400 joined ; nearly 20 matched	400	19 ± 1	0.0950 ± 0.0050
http://www.sz120.com/xwdt/ynxw/22205/	over 500 joined; 3 matched	525 ± 25	3	0.0115 ± 0.0005
http://www.sc.xinhuanet.com/content/2012-02/06/content_24649397.htm	over 500 joined; 8 matched	525 ± 25	8	0.0306 ± 0.0015
http://dqnews.zjol.com.cn/dqnews/system/2010/08/17/012525402.shtml	over 500 joined; over 10 matched	525 ± 25	11 ± 1	0.0422 ± 0.0058
http://cheshang.16888.com/newsinfo/2011/1115/141264.html	nearly 600 joined; nearly 40 matched	570 ± 30	38 ± 2	0.1341 ± 0.0141
http://bbs.heze.cc/thread-842865-1-1.html	over 600 joined; over 78 matched	630 ± 30	78	0.2482 ± 0.0118
http://www.8hy.org/hyjy/hy6240/1	nearly 800 joined; 58 matched	760 ± 40	58	0.1531 ± 0.0081
http://www.cdrb.com.cn/html/2012-04/03/content_1546492.htm	over 800 joined; over 20 matched	840 ± 40	21 ± 1	0.0502 ± 0.0047
http://heilongjiang.dbw.cn/system/2013/02/16/054584150.shtml	nearly 1000 joined; about 20 matched	950 ± 50	20 ± 1	0.0423 ± 0.0043
http://www.e0734.com/2012/0502/90707.html	nearly 1000 joined; 58 matched	950 ± 50	58	0.1224 ± 0.0064
http://sz.tznews.cn/tzwb/html/2012-07/09/content_71285.htm	nearly 1000 joined; 64 matched	950 ± 50	64	0.1351 ± 0.0071
http://www.xtrb.cn/epaper/ncwb/html/2011-08/09/content_275667.htm	about 1000 joined; 12 matched	1000 ± 50	12	0.0241 ± 0.0012
http://www.hukou365.com/cwbbs/forum/showtopic_tree.jsp?rootid=194730	about 1000 joined; 15 matched	1000 ± 50	15	0.0301 ± 0.0015
http://news.163.com/10/0329/03/62TPSMMO000146BB.html	about 1000 joined; nearly 100 matched	1000 ± 50	95 ± 5	0.1910 ± 0.0196
http://www.chinajilin.com.cn/content/2009-02/15/content_1495554.htm	over 1000 joined; 3 matched	1050 ± 50	3	0.0057 ± 0.0003
http://sy.house.sina.com.cn/news/2011-12-27/114483993.shtml	over 1000 joined; 4 matched	1050 ± 50	4	0.0076 ± 0.0004
http://news.dayoo.com/guangzhou/201205/02/73437_23554932.htm	over 1500 joined; 48 matched	1575 ± 75	48	0.0611 ± 0.0029
http://cq.qq.com/a/20090824/000190.htm	over 1500 joined; over 100 matched	1575 ± 75	105 ± 5	0.1339 ± 0.0127
http://news.qq.com/a/20111228/000342.htm	over 1600 joined; 31 matched	1680 ± 80	31	0.0370 ± 0.0018
http://www.efu.com.cn/data/2011/2011-08-09/389729.shtml	over 2000 joined; nearly 100 matched	2100 ± 100	95 ± 5	0.0909 ± 0.0091
http://ent.163.com/12/1203/13/8HQ885MN00032DGD.html	over 2000 joined; over 113 matched	2100 ± 100	119 ± 6	0.1139 ± 0.0111
http://www.subaonet.com/html/society/2010426/3C95FFIB98JI5FC.html	nearly 3000 joined; nearly 100 matched	2850 ± 150	95 ± 5	0.0670 ± 0.0070
http://wb.sznews.com/html/2011-11/07/content_1812730.htm	about 3000 joined; 186	3000 ± 150	186	0.1243 ± 0.0062
http://heilongjiang.dbw.cn/system/2012/04/23/053819817.shtml	over 3000 joined; over 200 matched	3150 ± 150	210 ± 10	0.1339 ± 0.0127
http://news.cnnb.com.cn/system/2011/10/31/007128083.shtml	over 4000 joined; over 500 matched	4200 ± 200	525 ± 25	0.2511 ± 0.0239
http://www.people.com.cn/GB/paper447/17168/1505082.html	nearly 5000 joined; 108 matched	4750 ± 250	108	0.0456 ± 0.0024
http://news.timedg.com/2012-04/16/content_9577975.htm	over 5000 joined; 218 matched	5250 ± 250	218	0.0832 ± 0.0040
http://www.gddgart.com/artcenter/html3asp/town3ship/dq2012714_2357.asp	over 5000 joined; 231 matched	5250 ± 250	231	0.0882 ± 0.0042
http://epaper.oeeee.com/I/html/2012-11/12/content_1751538.htm	over 5000 joined; 237 matched	5250 ± 250	237	0.0905 ± 0.0043
http://news.hsw.cn/system/2010/06/28/050547974.shtml	over 6000 joined; over 270 matched	6300 ± 300	284 ± 14	0.0906 ± 0.0088
http://fj.sina.com.cn/news/s/2012-08-24/07186785.html	nearly 10000 joined; 28 matched	9500 ± 500	28	0.0059 ± 0.0003
http://net.chinabyte.com/164/12210164.shtml	nearly 10000 joined; about 100 matched	9500 ± 500	100 ± 5	0.0212 ± 0.0022
http://epaper.hljnews.cn/shb/html/2008-05/26/content_199685.htm	nearly 10000 joined; nearly 2000 matched	9500 ± 500	1900 ± 100	0.4022 ± 0.0422
http://www.estour.gov.cn/news/lvyouxinwen/2011/815/1181583840H7H40DE3ADE501J93BG9.shtml	over 10000 joined; about 400 matched	10500 ± 500	400 ± 20	0.0766 ± 0.0075
http://www.048100.com.cn/news/bdxw/2009-04-20/617.html	over 10000 joined; over 1000 matched	10500 ± 500	1050 ± 50	0.2009 ± 0.0191
http://www.estour.gov.cn/news/lvyouxinwen/2011/815/1181583840H7H40DE3ADE501J93BG9.shtml	about 16000 joined; over 700 matched	16000 ± 800	735 ± 35	0.0923 ± 0.0090
http://www.estour.gov.cn/news/lvyouxinwen/2011/815/1181583840H7H40DE3ADE501J93BG9.shtml	over 16000 joined; over 600 matched	16800 ± 800	630 ± 30	0.0753 ± 0.0072
http://zjnews.zjol.com.cn/05zjnews/system/2009/03/30/015385573.shtml	over 50000 joined; over 3000 matched	52500 ± 2500	3150 ± 150	0.1206 ± 0.0115